

Behavioral Health Round Domes: BH-RDLP-LED

Ligature Resistant 2FT, 3FT, 4FT Recessed Sealed Round Domes

- Available in 2ft, 3ft, and 4ft sizes
- Shallow depth less than 4.5"
- Indirect and Backlit design allow for a uniform appearance with reduced lamp image
- IP65 Rated & Suitable for Wet Locations
- Recessed housing for Hardlid or Lay-in Grid installations
- Ligature Resistant extruded aluminum door frame design with Flush Captive Torx Fasteners
- Designed for use in Behavioral Health applications.
- B.A.A. & B.A.B.A Compliant & Made in the USA by a Family Owned US Corporation
- Available in single or multi-function switching (exam,ambient,night)



DISCLAIMER: Although KURTZON has prepared the information contained in this document with all due care, KURTZON does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and KURTZON is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

ORDERING GUIDE

Series	Size	LED Type	CCT/CRI	Voltage	Circuit	Optics	Options
BH-RDLP		LEDR					
Series	Size	LED Package	CCT/CRI	Voltage	Circuit	Optics	Options
BH-RDLP	20 Nominal 2FT Diameter	LEDR Static White LED	80+ CRI	UNV 120-277 VAC	1C Single Circuit	125FFP 1/8" Flat Frosted Polycarbonate	FC Fuse and Fuse Holder
	30 Nominal 3FT Diameter		830 3000K	347 347 VAC	2C Dual Circuit	187FFP 3/16" Flat Frosted Polycarbonate	EM10 10W Integral Emergency Battery
	40 Nominal 4FT Diameter		835 3500K			250FFP 1/4" Flat Frosted Polycarbonate	PXL Program to User Specified Lumen Value
			840 4000K				PXW Program to User Specified Wattage Value
			850 5000K				10KV 10KV Parallel Surge Protector
							AMW Anti-Microbial White Powdercoat
			90+ CRI				NL500 500lm 90 CRI 2700K Night Light
			927 2700K				RFI MIL-STD-461 RFI Filter (1 Per Circuit)
			930 3000K				LVC Low Voltage Controller
			935 3500K				
			940 4000K				
	Consult factory for other sizes	Consult factory for other options					

Ordering Notes, If Applicable

Behavioral Health Round Domes: BH-RDLP-LED

Ligature Resistant 2FT, 3FT, 4FT Recessed Sealed Round Domes

SPECIFICATIONS

HOUSING: Lapped and spot welded 20 ga. CRS construction. Designed for installation Plaster or Drywall ceilings before ceiling closure and in T-bar grid systems. Consult factory for other sizes.

DOOR FRAME: One piece extruded aluminum frame with 90 degree return to prevent ligature. Designed to be Mechanically secured to housing with Torx countersunk screws to reduce risk of tampering.

GASKETS: Door frame provided with factory installed gasket on the flange to seal off the room.

LENS: Polycarbonate lens is sealed to door frame with a pick proof security grade sealant and then mechanically secured. Available up to 1/4" thick and provided with a frost overlay.

LEDS: LEDs Available in both 80 & 90 CRI and a wide range of color temperature options. LED placement combined with reflector system allows both direct and indirect lighting which allows uniform and efficient illumination. Consult factory for options not shown.

ELECTRICAL: Standard Universal Voltage Class 2 Drivers are dimmable down to 1% via 0-10v dimming. Available in either Single Circuit (1C) or Two Circuit (2C) switching. note that 2C option allows exam (direct) and ambient (indirect) illumination. Night Light option will provide another dedicated switched circuit with a 2700K cct light. See option for available Emergency Batteries, surge protection, Filtering, or factory installed Low Voltage Controllers.

INSTALLATION: Suitable for recessed installation into covered ceilings. Provided with 3/8" diameter mounting holes for threaded rod installation to decking above (hardware by others). Confirm ceiling compatibility with dimensioned drawings below. Note that the fixture must be installed prior to hanging the ceiling.


FINISH: All materials are provided with gloss high reflectance white polyester powder coat with 1000hr salt spray test per ASTM B117. AMW option provides a white anti-microbial polyester powder coat on the door frame.

LISTINGS: IP65 Rated for dust and water ingress. Drivers and LEDs are covered by a 5 year warranty, the remaining fixture is covered by a 10 year warranty. Suitable for Wet Locations. Suitable for Behavioral Health Ligature Resistant installations. Suitable for ISO 5-9 Cleanrooms. This product Series is both Build America Buy America (B.A.B.A.) & Buy American Act (B.A.A.) compliant.


ENERGY DATA

RDLP ROUND DOMES ESTIMATED ENERGY DATA											
SIZE	CIRCUIT	EXAM 80+ CRI			AMBIENT 80+ CRI			EXAM + AMBIENT 80+ CRI			
		LM	W	LM/W	LM	W	LM/W	LM	W	LM/W	
RDLP20	1C	-	-	-	-	-	-	6108	56	109	
RDLP20	2C	3953	34.5	114	2194	21.5	102	6108	56	109	
RDLP30	1C	-	-	-	-	-	-	16556	149	111	
RDLP30	2C	12540	107	117	4347	42	104	16556	149	111	
RDLP40	1C	-	-	-	-	-	-	20660	187	110	
RDLP40	2C	15638	134	117	5434	53	103	20660	187	110	


NOTE: USE LUMEN MULTIPLIER OF .95 FOR 90 CRI




EXAM MODE



AMBIENT MODE



EXAM + AMBIENT MODE



NIGHT LIGHT MODE



Behavioral Health Round Domes: BH-RDLP-LED

Ligature Resistant 2FT, 3FT, 4FT Recessed Sealed Round Domes




ROUND DOME REFERENCE DIMENSIONS									
SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM I
20	20.25"	23.19"	23.19"	10.25"	14.00"	3.66"	0.62"	4.31"	20.10"
30	37.12"	41.84"	41.84"	19.50"	19.50"	3.66"	0.62"	4.31"	36.93"
40	42.94"	47.63"	47.63"	23.50"	23.50"	3.66"	0.62"	4.31"	42.79"

NOTE TO INSTALLER:


SINCE THE FIXTURE BODY IS LARGER THAN THE CEILING CUTOUT, THE FIXTURE MUST BE INSTALLED PRIOR TO HANGING THE GRID OR INSTALLING THE DRYWALL CEILING.

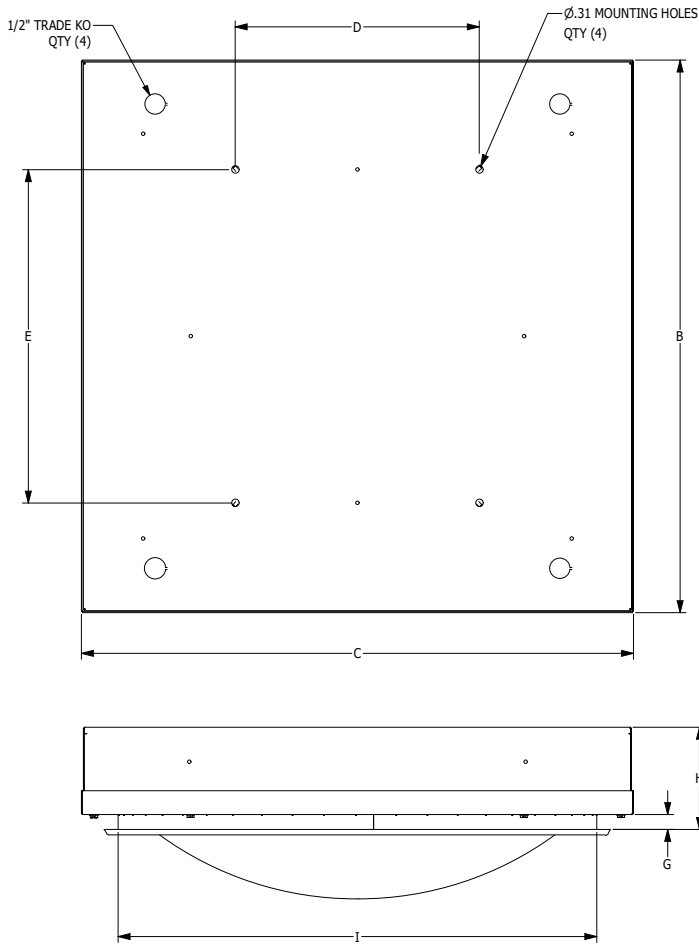


DRYWALL SECTION VIEW

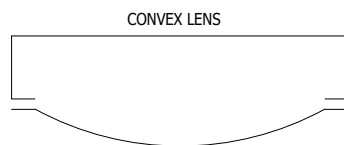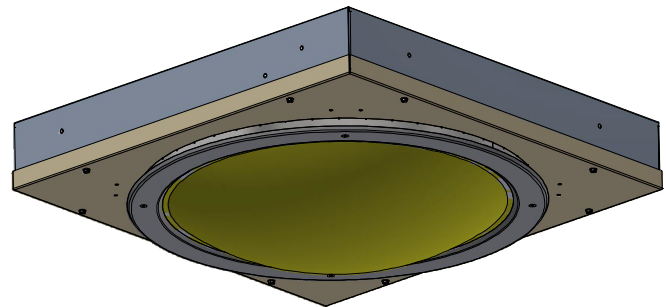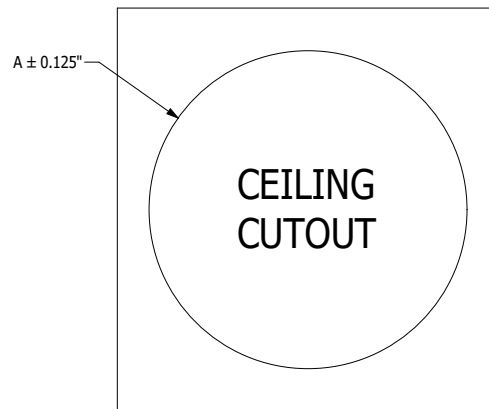

CONVEX LENS



CONCAVE LENS



FLAT LENS