

Circadian Cleanroom KL Vivarium Troffers



1x4, 2x2 and 2x4 Red/BIOS® LED Luminaires

ENERGY DATA - COLOR LED

OVERLAP-FGRS-RED LED TROFFER								
ENCLOSURE SIZE	LED SELECTION	630nm (RED)			660nm (RED)			AMBIENT TEMP RATING
		LUMENS	WATTS	EFFICACY	LUMENS	WATTS	EFFICACY	MAXIMUM ³
1X4	1RLED	1,122	27	42	1,202	44.5	27	40°C (104°F)
1X4	2RLED	2,068	53	39	2,405	88.9	27	40°C (104°F)
2X2	1RLED	549	14	39	593	22.2	26.7	40°C (104°F)
2X2	2RLED	1,011	27	37	1,185	44.5	26.7	40°C (104°F)
2X2	3RLED	1,560	51	31	1,778	66.7	26.7	40°C (104°F)
2X2	4RLED	2,022	53	38	2,371	88.9	26.7	40°C (104°F)
2X4	1RLED	1,247	27	46	1,281	44.5	28.8	40°C (104°F)
2X4	2RLED	2,298	53	43	2,562	89	28.8	40°C (104°F)
2X4	3RLED	3,545	80	44	3,844	133.5	28.8	40°C (104°F)
2X4	4RLED	4,596	106	43	5,125	178	28.8	40°C (104°F)

* View previous page for energy data notes.

COLOR LED RELATIVE DISTRIBUTION

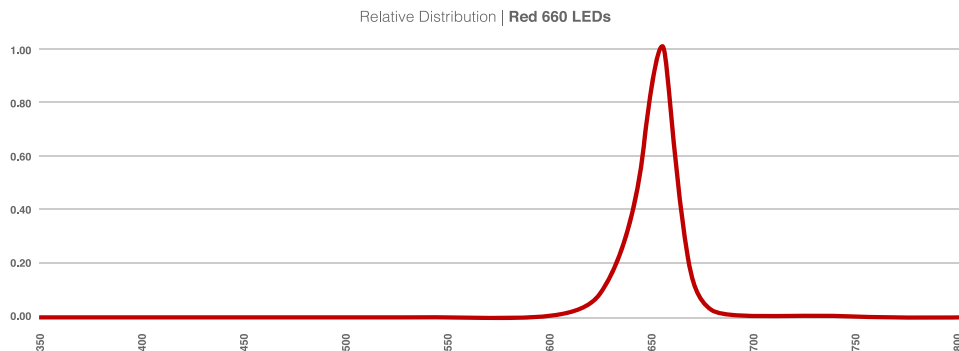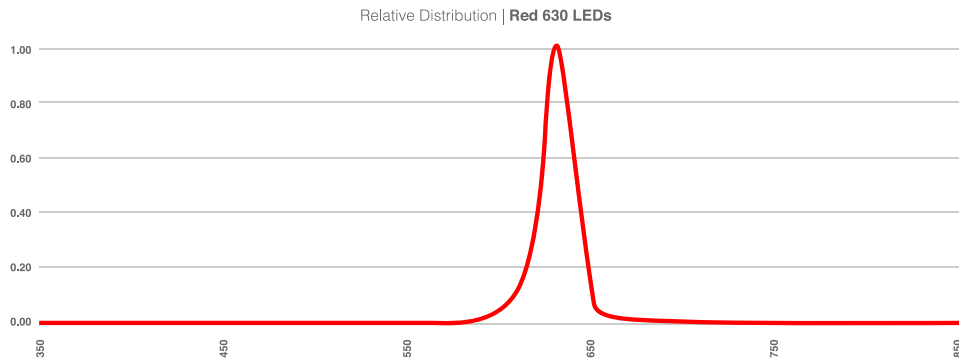


Circadian Cleanroom KL Vivarium Troffers

1x4, 2x2 and 2x4 Red/BIOS® LED Luminaires

HOW BIOS® WORKS

Production of melatonin, the hormone that helps us to sleep, is regulated by the ipRGC, a non-visual photoreceptor in the human eye. The wavelength of blue sky light at 490nm, present in sunlight, prevents melatonin production during the day. These signals are crucial in allowing humans to distinguish between day and night, promoting better sleep, health and well-being.



DYNAMIC LIGHT ENGINE

The SkyBlue® Dynamic Light Engine automatically calibrates the light level, reducing melanopic lux while keeping photopic lux at a constant. Dynamic light engines are paired with the current sensing smart BIOS® Bio-Dimming module allowing it operate using any single channel CC LED driver, using any dimming interface. Available in 3500K (dim to 3000K), and 4000K (dim to 3500K).

STATIC LIGHT ENGINE

The SkyBlue® Static Spectrum Light Engine delivers the industry’s best melanopic-to-photopic (m/p) ratio, with R9 greater than 90 at each color temperature. Easily integrated into existing LED fixtures and compatible with all LED drivers, the SkyBlue® Static Spectrum Light Engine is the ideal replacement for static color light fixtures. Static light engines have the full output of BIOS® SkyBlue® all the time and the peak cannot be adjusted.

DIMMER SETTINGS WITH BIOS® DYNAMIC DIMMING TECHNOLOGY

	DIMMER SETTING	BIOS® SKYBLUE®	LIGHT OUTPUT
	100% (full on)	100%	100%
	99%-51%	100%-0%	100%-90%
	50%	No BIOS®	~90%
	49%-0%	No BIOS®	Linear Dimming

BIOS® SkyBlue® operates at 100% when the light output is at 100%, for maximum circadian impact. As the light is dimmed, BIOS® SkyBlue® dims until 50% is reached when the BIOS® SkyBlue® is no longer present.