

Cleanroom KL-R Amber Troffers

1x4, 2x2 and 2x4 Amber/White LED Recessed Luminaires

- **Rated IP66**
- **Suitable for ISO 3-9 Cleanspaces**
- **Suitable for 209E Class 1-100,000 Cleanspaces**
- **ETL listed for Wet Locations**
- **One piece overlapping doorframe**
- **Robotically seam welded housing**
- **0-10v 1% Dimming Standard for most configurations.**
- **Narrow Spectrum 590nm True Amber LEDs**
- **White / Amber separately controlled circuits**
- **Recessed Housing suitable for Tbar Grid AND Hardlid Installations**
- **BAA Compliant & Made in the USA by a Family Owned US Corporation**



DISCLAIMER: Although KURTZON has prepared the information contained in this document with all due care, KURTZON does not warrant or represent that the information is free from errors or omission. While the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and KURTZON is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.



ORDERING GUIDE

Series	Material	Size	Row Qty.	Amber LED	Row Qty.	White LED	CCT/CRI	Voltage	Optics	Options		
KL-R				YLED590								
Series	Material	Size	Light Source				Voltage	Optics				
KL-R	White 430 SS Hsg. & Polished 304 SS Door	1x4 1' x 4' Housing 3 LED Rows Max	1	YLED590	1	LEDR LEDH LEDHF	83 CRI: 830 3000K 835 3500K 840 4000K 850 5000K 90+ CRI: 935 3500K 940 4000K 950 5000K	120V 277V UNV 347V*	P12ACR 0.135" P12 Prismatic Impact Resistant Acrylic (Inverted)	LEX 0.125" P12 Prismatic Polycarbonate (Inverted)	A19 0.156" A19 Prismatic Impact Resistant Acrylic (Inverted)	
			2		2							
	White AL Hsg. & Polished 304 SS Door	2x2 2' x 2' Housing	2		1							
			3		2							
	White AL Hsg. & White AL Door	OR	2x4 2' x 4' Housing		3							2
					4							3
	White AL Hsg. & White CRS Door	5 LED Rows Max										

*347V Available with 10% dimming, not all options are compatible with 347V

NOTE: Additionally available in 95+ CRI with Seoul Sun-Like LEDs. Consult factory for more information.

Ordering Notes, If Applicable

Options	
SW	Wet Location Hub Supplied (not installed)
PxL *	Programmed to User Specified Lumen Value.
PxW *	Programmed to User Specified Wattage Value.
10KV	10KV Parallel Surge Protection (One Supplied Per Circuit)
GTD	Generator Transfer Device
WHIP	Must Specify Length and Wire Qty
OCCMW	Internal microwave OCC Sensor
FC	Fuse & Holder (One Supplied Per Circuit)
EM10	10W Integral LED EM (Specify Input Voltage)
EM20	20W Remote LED EM (Specify Input Voltage)
EDL	-40F Electronic Driver
WHT	White Finished Door & HSG
AMW	Anti-Microbial White Powdercoat
2/EDY	Two Circuits of Amber Light
2/EDW	Two Circuits of White Light
GG	1/8" Thick Grid Gasket (Provided Loose)

Note*: Specify Value in Ordering Notes

Cleanroom KL-R Amber Troffers

1x4, 2x2 and 2x4 Amber/White LED Recessed Luminaires

SPECIFICATIONS

HOUSING: One piece, hole free, robotically seam welded housing has flattened knockouts for a superior seal. Housings are available in .040" 3003 Aluminum or 20Ga 430 Stainless Steel.

DOOR FRAME: One piece door frame with welded corners overlaps the fixture allowing the NSF approved microcellular gasket to seal to the mounting surface. Door frame is hinged by aircraft cables and is supplied with captive stainless steel flush head screws to allow easy wiping of the surface. Available in .050" 3003 Powder coated Alum., 20Ga 304 Polished SS, or 18Ga Powder coated CRS.

GASKETS: NSF Listed closed cell microcellular extruded KleanLock SealPro gasket with vulcanized corners making a one-piece oil and solvent resistant gasket system. GG option provides a loose 1/8" thick adhesive backed gasket intended to adhere to the top face of a suspended grid ceiling for grid profiles that do not already have gasket on them.

OPTICS: Standard P12 prismatic acrylic lens is provided when no other options are selected. All prismatic lensing options come with an inverted lens so the smooth side faces the room for easy cleaning. All optics are sealed to the door with NSF listed RTV silicone sealant. Other optics are available, consult factory for more information or options not listed.

LEDS: Fixture available with Amber only or Amber & White LED's, each color will be supplied with its own driver for dual switching. Amber LED's provide a narrow 590nm spectrum for wavelength sensitive applications. White high efficiency LEDs are commercially available & available in a wide variety of CRI and CCT. All boards have zhaga recognized hole patterns and come with a 5 year warranty.

DRIVERS: Standard Universal Voltage Class 2 drivers are 0-10v Dimmable to 1%, and rated -20C (-4F). They come with at least 2.5Kv surge protection, have less than 10% THD at max load, Ballast Factor Greater than .95 and are programmable to match specific lumen or wattage requirements. Drivers with higher input voltage ratings are available, consult factory for driver specifications. (each color LED comes standard with its own driver)


REFLECTOR: Die formed metal with high reflectance white polyester powder coat finish. Typical reflectivity 92%.

INSTALLATION RECESSED: Suitable for recessed Non-IC installation into covered ceilings. Fixtures are supplied with .875" flattened knockouts for supply entry. Recessed housings have (4) swing out toggle arms that are used to draw the fixture in to the ceiling for hard lid installation without the need for a yoke hanger. The toggle arm adjuster bolts are accessible from the room side of the luminaire and the actual toggles can be used as means of establishing a seismic support for lay in ceiling installations. Confirm ceiling compatibility with dimension drawings below.

FINISH: Stainless steel door frames are satin polished unless WHT or AMW options are selected. All other materials are provided with gloss high reflectance white polyester powdercoat with 1000hr salt spray test per ASTM B117. AMW option provides a white anti-microbial polyester powder coat to all exposed surfaces.

LISTINGS: IP66 rated for dust and water ingress. Suitable for 1700 PSI high pressure hosedowns. ETL listed per UL_1598 for wet locations. Chicago Plenum Rated. Certified ISO-14644-1 for class 3 through class 9 cleanspaces. Certified Fed Std 209E for Class 1 through Class 100,000 cleanspaces. NSF2 Listed for non-food zones & Splash Zones. Drivers and LEDs are covered by a 5 year warranty, the remaining fixture is covered by a 10 year warranty. This product is Buy American Act (B.A.A.) compliant.

PRODUCT DRAWINGS

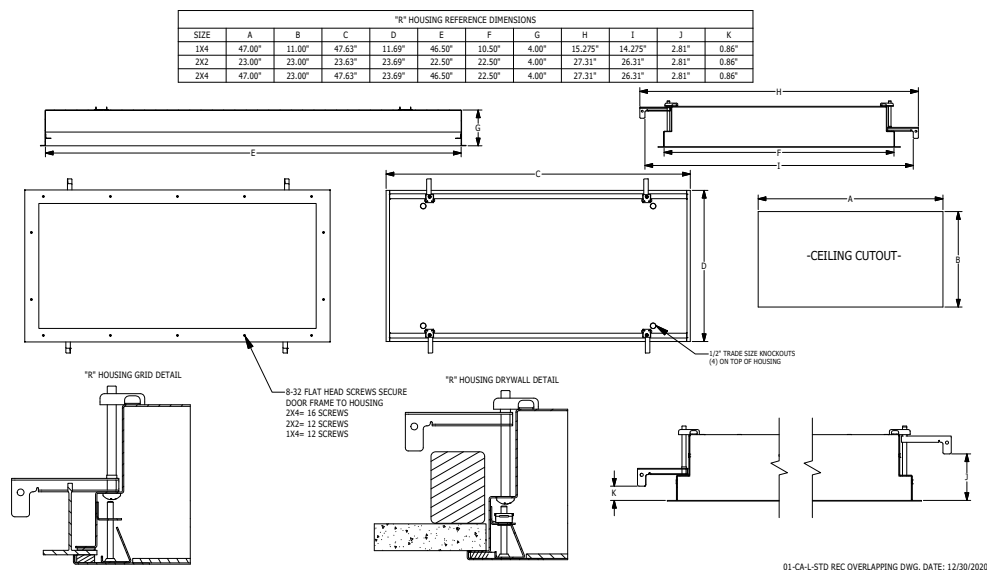

Cleanroom KL-R Amber Troffers

1x4, 2x2 and 2x4 Amber/White LED Recessed Luminaires

ENERGY DATA- WHITE LED

SURFACE & RECESSED OVERLAP 2 CIRCUIT TROFFER (APPROX ¹ LUMENS DELIVERED)										
ENCLOSURE SIZE	LIGHT PACKAGE	83 CRI (3000K - 5000K)				90 CRI (3500K, 4000K)				STANDARD DIMMING
		LUMENS	WATTS ²	EFFICACY ³	MAX AMB TEMP	LUMENS	WATTS ²	EFFICACY ³	MAX AMB TEMP ⁴	
1X4	1LEDR	2,974	29	103	45°C (113°F)	2,868	29	99	45°C (113°F)	0-10V 1%
1X4	1LEDH	5,740	57	101	40°C (104°F)	5,490	57	96	40°C (104°F)	0-10V 1%
1X4	2LEDR	5,948	55	108	45°C (113°F)	5,736	56	103	45°C (113°F)	0-10V 1%
1X4	1LEDHF	9,020	77	117	35°C (95°F)	7,773	92	84	35°C (95°F)	0-10V 1%
1X4	2LEDH	11,493	109	106	35°C (95°F)	10,980	109	101	35°C (95°F)	0-10V 1%
1X4	EM10	1010-1170	4	NA	40°C (104°F)	850-1030	4	NA	40°C (104°F)	NA
2X2	1LEDR	1,808	15	121	45°C (113°F)	1,521	15	101	45°C (113°F)	0-10V 1%
2X2	1LEDH	3,106	29	107	40°C (104°F)	2,964	29	102	40°C (104°F)	0-10V 1%
2X2	2LEDR	3,165	29	109	45°C (113°F)	3,042	29	105	45°C (113°F)	0-10V 1%
2X2	1LEDHF	4,630	39	119	40°C (104°F)	4,106	46	89	40°C (104°F)	0-10V 1%
2X2	3LEDR	4,747	42	113	45°C (113°F)	4,563	42	109	45°C (113°F)	0-10V 1%
2X2	2LEDH	6,213	55	113	40°C (104°F)	5,928	55	108	40°C (104°F)	0-10V 1%
2X2	2LEDHF	9,260	77	120	40°C (104°F)	8,212	92	89	35°C (95°F)	0-10V 1%
2X2	3LEDH	9,319	80	116	40°C (104°F)	8,892	81	110	35°C (95°F)	0-10V 1%
2X2	3LEDHF	13,890	115	121	35°C (95°F)	12,319	138	89	35°C (95°F)	0-10V 1%
2X2	EM10	1070-1210	4	NA	40°C (104°F)	890-1110	4	NA	40°C (104°F)	NA
2X4	1LEDR	3,431	29	118	45°C (113°F)	3,280	29	113	45°C (113°F)	0-10V 1%
2X4	1LEDH	6,744	57	118	40°C (104°F)	6,408	57	112	40°C (104°F)	0-10V 1%
2X4	2LEDR	6,864	55	125	45°C (113°F)	6,567	56	117	45°C (113°F)	0-10V 1%
2X4	1LEDHF	9,840	77	128	40°C (104°F)	8,872	93	95	40°C (104°F)	0-10V 1%
2X4	3LEDR	10,295	83	124	45°C (113°F)	9,851	83	119	45°C (113°F)	0-10V 1%
2X4	2LEDH	13,488	109	124	40°C (104°F)	12,816	109	118	40°C (104°F)	0-10V 1%
2X4	2LEDHF	19,680	153	129	40°C (104°F)	17,744	187	95	40°C (104°F)	0-10V 1%
2X4	3LEDH	20,233	165	123	40°C (104°F)	19,224	165	117	40°C (104°F)	0-10V 1%
2X4	3LEDHF	29,520	229	129	35°C (95°F)	26,616	280	95	35°C (95°F)	0-10V 1%
2X4	EM10	1180-1290	4	NA	40°C (104°F)	950-1190	4	NA	40°C (104°F)	NA

¹ DELIVERED LUMEN DATA IS EXTRAPOLATED FROM MEASURED DATA @25C WITH NO EXTRA OPTIONS. VARIANCES WILL OCCUR WHEN OPTIONS ARE CHOSEN

² WATTAGE IS MEASURED WITH 4000K SELECTION @ 120vAC AND Tambient = 25C. WATTAGES MAY VARY WITH ALTERNATE CONFIGURATIONS

³ EFFICACY CALCULATED USING 4000K CCT DATA.

⁴ MAX AMBIENT TEMP RATING, NON-IC INSTALLATION. TEMP RATING MAY VARY WITH SPECIFIED DRIVERS OR ANY NON STANDARD SELECTION

⁵ 90 MINUTE 10W EMERGENCY DRIVER; LUMENS CALCULATED BASED ON FIXTURE EFFICACY.

Cleanroom KL-R Amber Troffers

1x4, 2x2 and 2x4 Amber/White LED Recessed Luminaires

ENERGY DATA- COLORED LED

SURFACE & RECESSED OVERLAP AMBER LED TROFFER							
ENCLOSURE SIZE	LED SELECTION	DIMMING	590nm (Amber)			AMBIENT TEMP RATING	
			LUMENS	WATTS	EFFICACY	MINIMUM	MAXIMUM ³
1X4	1YLED	0-10V 1%	1,972	43	46	-20°C (-4°F)	40°C (104°F)
1X4	2YLED	0-10V 1%	3,945	86	46	-20°C (-4°F)	40°C (104°F)
2X2	1YLED	0-10V 1%	1,132	22	51	-20°C (-4°F)	40°C (104°F)
2X2	2YLED	0-10V 1%	2,264	43	53	-20°C (-4°F)	40°C (104°F)
2X2	3YLED	0-10V 1%	3,396	65	52	-20°C (-4°F)	40°C (104°F)
2X2	4YLED	0-10V 1%	4,528	86	53	-20°C (-4°F)	40°C (104°F)
2X4	1YLED	0-10V 1%	2,428	44	55	-20°C (-4°F)	40°C (104°F)
2X4	2YLED	0-10V 1%	4,856	87	56	-20°C (-4°F)	40°C (104°F)
2X4	3YLED	0-10V 1%	7,283	130	56	-20°C (-4°F)	40°C (104°F)
2X4	4YLED	0-10V 1%	9,711	173	56	-20°C (-4°F)	40°C (104°F)

¹ DELIVERED LUMEN DATA IS EXTRAPOLATED FROM MEASURED DATA @25C WITH NO EXTRA OPTIONS. VARIANCES WILL OCCUR WHEN OTHER SELECTIONS ARE MADE

² WATTAGE IS MEASURED WITH LED 840 SELECTION @ 120vAC AND Tambient = 25C. WATTAGES WILL VARY AND INCREASE WHEN ALTERNATE OPTIONS ARE SELECTED

³ MAX AMBIENT TEMP RATING, NON-IC INSTALLATION. TEMP RATING IS WITH NO OTHER OPTIONS SELECTED. WHITE LEDS ONLY SUITABLE FOR 40C AMBIENT

COLOR LED RELATIVE DISTRIBUTION

