

Darkroom Safelights

1x1 Darkroom Safelights With Colored LED Light


- **For Low Level Illumination**
- **Provided with narrow spectrum non-filtered LEDs**
- **Available in Red, Red/White, Amber, Amber/White, Green, Green/White colors.**
- **Made in the USA by a Family Owned US Corporation**




White (80 CRI)



Amber (590nm)



Red (660nm)



Green (540nm)



DISCLAIMER: Although KURTZON has prepared the information contained in this document with all due care, KURTZON does not warrant or represent that the information is free from errors or omission. While the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and KURTZON is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

ORDERING GUIDE

Series	Installation Type	Material	Size	Light Source	Voltage	Options
DKS						
DKS	F/G: Recessed (Suitable for Flange & Grid) S: Surface	2: White CRS Hsg. & Polished 304 SS Door	1x1: 1' x 1' Housing	AMB: 590nm AMB/WHT: 590nm / 80CRI 4000K CCT RED: 660nm RED/WHT: 660nm / 80CRI 4000K CCT GRN: 540nm GRN/WHT: 540nm / 80CRI 4000K CCT (Select only one light source)	UNV	D2OFF: 0-10V 1% Dim To Off TG: .156" Prismatic Tempered Glass LEX: .125" P12 Polycarbonate TP: Tamper Proof Fasteners WHT: White Painted Door Frame INTDIM: Integral 0-10V Adjustable Dimming Knob

ENERGY DATA

DARKROOM SAFELIGHT						
ENCLOSURE SIZE	LAMP TYPE	LUMEN OUTPUT	LAMP WATTAGE	WAVELENGTH	DIMMING	MAX AMBIENT TEMP (°C)
1X1	RED	50.4	4.2	660 nm	0-10V 1%	40°C (104°F)
1X1	AMBER	83.7	4.4	590 nm	0-10V 1%	40°C (104°F)
1X1	GREEN	167.7	4.4	540 nm	0-10V 1%	40°C (104°F)
1X1	WHITE (80 CRI, 4000K)	1,378.0	20	N/A	0-10V 1%	40°C (104°F)

Darkroom Safelights

1x1 Darkroom Safelights With Colored LED Light

SPECIFICATIONS

HOUSING: Lapped and spot welded 20-gauge CRS construction.

DOOR FRAME: 20Ga gauge 4B satin polished stainless steel door frame. Door frame neoprene gasketed to housing and secured with flush mounted captive stainless steel fasteners. Hinged to housing with stainless steel cables.

REFLECTOR: Die formed metal with high reflectance white polyester powder coat finish. Typical reflectivity 92%.

LENS: 0.125" frost acrylic lens standard; see options for other choices.

LED: Provided with Narrow Spectrum non-filtered dimmable LED light sources. Available in DEEP RED (660nm), TRUE AMBER (590nm), Or GREEN (540nm) light spectrums. Additionally, each color is also available with a separately switched and dimmable white light source as well (80+ CRI; 4000K CCT).

ELECTRICAL: Single 1/2 inch trade size conduit knockout located on rear of housing for wiring. Each color comes with its own dedicated 0-10v 1% dimming driver. IDIM option provides a rotary dimmer mounted inside the light fixture for field adjusting the illumination intensity for applications that cannot run new dimming wires. Consult factory for other options or requirement not shown.

FINISH: White powder coat finish (1,000 hour salt spray test) for housing and 4B satin polish stainless steel finish for doorframe.


RECESSED INSTALLATION: Suitable for both Flanged and Grid installation. Yoke hanger mounting is standard for a secure installation in plaster or drywall ceilings. T-Bar supports are provided for simple grid installation. Support to structure by others.

SURFACE INSTALLATION: Four .312 dia. holes in rear of housing for mounting.

WARRANTY: Drivers and LEDs are covered by a 5 year warranty, the remaining fixture is covered by a 10 year warranty

INTDIM OPTION: Rotary dimmer knob installed inside luminare for field adjustability where 0-10v dimming wires cannot be run in the room. Only accessible inside the luminare so the door frame must be removed. Dimming knob will only control the colored LED. Dimmer provides dim range of ~3% to 100% intensity.









RELATIVE INTENSITY

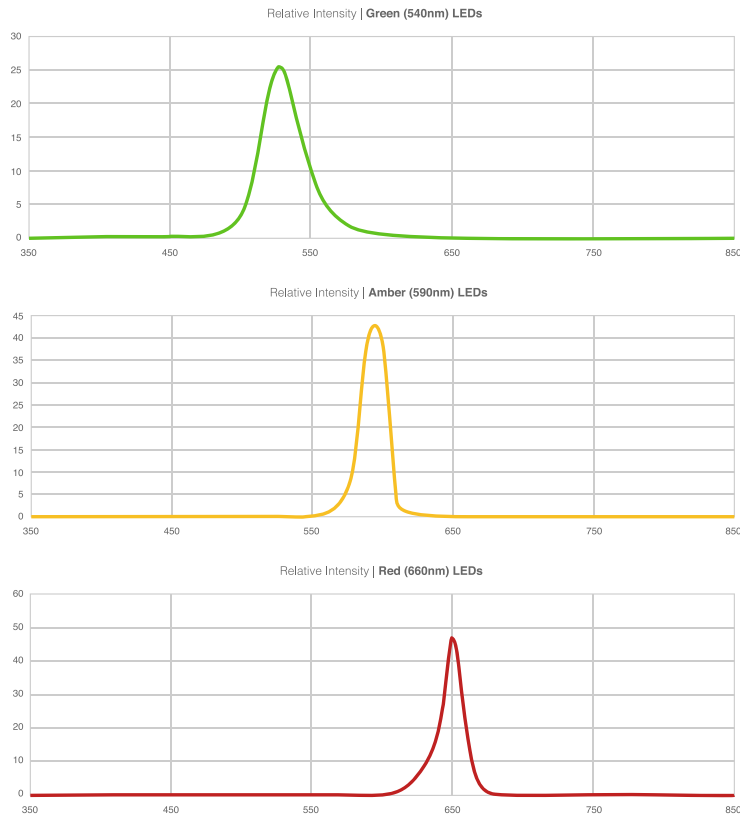

Darkroom Safelights

1x1 Darkroom Safelights With Colored LED Light

PRODUCT DRAWINGS

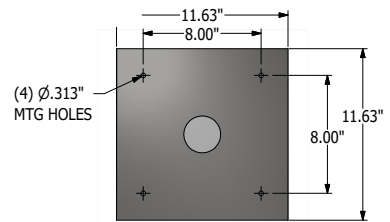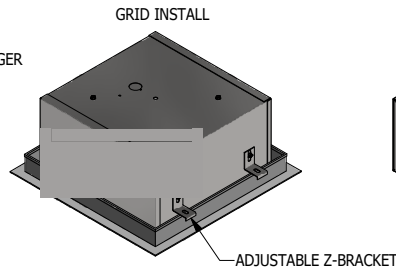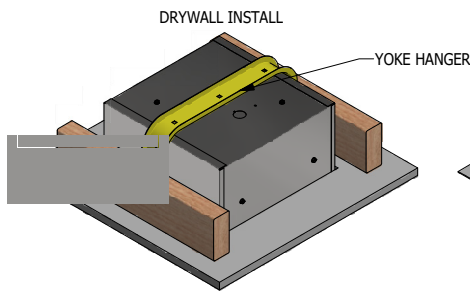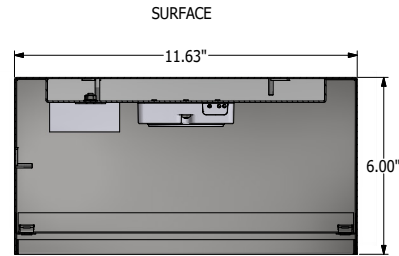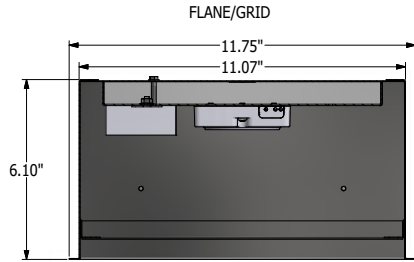

07-AA-L-1X1 DARKROOM DWG DATE: 8/7/2020

