

# Hazardous X22 KL Troffers

1x4, 2x2 and 2x4 Fluorescent Luminaires

- **Suitable For Use In Class 1, 2, & 3 Division 2 Groups A, B, C, D, E, F & G**
- **IP66 Rating**
- **One piece overlapping door**
- **UL Listed for wet locations**
- **Recessed Housing suitable for Tbar Grid and Hardlid Installations**
- **Made in the USA by a Family Owned US Corporation**



DISCLAIMER: Although KURTZON has prepared the information contained in this document with all due care, KURTZON does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and KURTZON is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

## ORDERING GUIDE

| Series   | Installation Type  | Material                                    | Size                              | Lamps                   | Voltage  | Options   |
|--|--|---|-----------------------------------|-------------------------|--|---|
| <b>KLX22</b>                                   |  |   |                                   |                         |  |   |
| <b>KLX22</b>                                   | <b>R: Recessed</b><br><br>(suitable for flange and grid) | 3: White 430 SS Hsg. & Polished 304 SS Door | <b>1x4: 1' x 4' Housing</b>       | 2/T5: F28T5             | <b>120V</b><br><b>277V</b><br><b>UNV</b><br><b>347V*</b> | <b>FC:</b> Fuse & Holder (One Supplied Per Circuit)<br><b>2/EB:</b> Two Ballasts (Two Circuits)<br><b>EBL:</b> -20F Electronic Ballast<br><b>WHT:</b> White Finished Door & HSG<br><b>LEX:</b> .125" Prismatic Polycarbonate<br><b>A19:</b> .156" Prismatic P19 Pattern Clear Acrylic<br><b>HIA:</b> .140" High Impact P12 Pattern Clear Acrylic<br><b>TG:</b> .156" Prismatic C73 Tempered Glass<br><b>SW:</b> Wet Location Hub Supplied (not installed)<br><b>10KV:</b> 10KV Parallel Surge Protection (One Supplied Per Circuit)<br><b>GTD:</b> Generator Transfer Device<br><b>WHIP:</b> Must Specify Length and Wire Qty |
|  |  | 4: White AL Hsg. & Polished 304 SS Door     |                                   | 2/T5HO: F54FTHO         |  |   |
|  |  | 5: White AL Hsg. & White AL Door            |                                   |                         |  |   |
|  | 7: White AL Hsg. & White CRS Door                        |   |                                   |                         |  |   |
|  | <b>S: Surface</b>  | 1: White CRS Hsg. & White CRS Door          | <b>1x4: 1' x 4' Housing</b>       | 1 or 2/T5: F28T5        |  |   |
|  |  | 2: White CRS Hsg. & Polished 304 SS Door    |                                   | 1 or 2/T5HO: F54FTHO    |  |   |
| 3: Polished 304 SS Hsg. & Polished 304 SS Door |  |   |                                   |                         |  |   |
|  |  | 4: White AL Hsg. & Polished 304 SS Door     | <b>2x2: 2' x 2' Housing</b><br>OR | 2,3, or 4/T5: F14T5     |  |   |
|  | 5: White AL Hsg. & White AL Door                         |   |                                   | 2,3, or 4/T5HO: F24T5HO |  |   |
|  |  | 6: White CRS Hsg. & White AL Door           | <b>2x4: 2' x 4' Housing</b>       |                         |  |   |
|  | 7: White AL Hsg. & White CRS Door                        |   |                                   |                         |  |   |

# Hazardous X22 KL Troffers

1x4, 2x2 and 2x4 Fluorescent Luminaires

## SPECIFICATIONS

**HOUSING:** One piece, hole free, robotically seam welded housing has flattened, silicone sealed knockouts for a superior seal. Recessed housings are available in .040" 3003 Aluminum or 20Ga 430 Stainless Steel. Surface housings are available in .050" 3003 Aluminum, 18Ga 304 Stainless Steel, or 20Ga Cold Rolled Steel.

**DOOR FRAME:** One piece door frame with welded corners overlaps the fixture allowing the NSF approved microcellular gasket to seal to the mounting surface. Door frame is hinged by aircraft cables and is supplied with captive stainless steel flush head screws to allow easy wiping of the surface. Available in .050" 3003 Powder coated Alum. , 20Ga 304 Polished SS, or 18Ga Powder coated CRS.

**GASKETS:** NSF Listed closed cell microcellular extruded KleanLock SealPro gasket with vulcanized corners making a one-piece oil and solvent resistant gasket system.

**LENS:** Impact resistant .135" thick virgin acrylic with P12 prismatic pattern inverted. Sealed to door with NSF listed RTV silicone. See "Options" for other choices.

**LAMPS:** Suitable for most T5 and T5HO lamps. (By others)

**ELECTRICAL:** Standard Class P Ballast - Electronic < 10% THD, high performance rapid start universal voltage (120-277). See options for Dimming or Cold Temp Ballasts, Others available (must specify). Dual level switching available with 2/EB option

**REFLECTOR:** Die formed metal with high reflectance white polyester powder coat finish. Typical reflectivity 92%.


**INSTALL RECESSED:** One fixture suitable for Grid and Flanged installation. Accommodates 1" and 1.5" T-Bar Grid (Consult factory for 2" T-Bar Grid compatibility). Four adjustable toggle arms with holes for seismic support wire attachment. Supply entry via 1/2" trade size flattened and silicone sealed knockouts.

**INSTALL SURFACE:** Four .312" dia. mounting holes and a removable gasketed wiring access plate with Supply entry via 1/2" trade size flattened and silicone sealed knockouts.

**FINISH:** Gloss white high reflectance 1000 hr. salt spray polyester powder coat finish standard for all recessed housings. Stainless steel doorframes and surface housings are satin polished unless option WHT is chosen.

**LISTINGS:** Listed for Class I,II & III Division II Groups A,B,C,D,F & G hazardous locations. IP66 rated for dust and water ingress. Suitable for 1700 PSI high pressure hosesdowns. UL listed per UL\_1598 for wet locations. Chicago Plenum Rated. Certified ISO-14644-1 for class 3 through class 9 cleanspaces. Certified Fed Std 209E for Class 1 through Class 100,000 cleanspaces. NSF2 Listed for Food Zones. Electrical components covered under manufacturers warranty, the remaining fixture is covered by a 10 year warranty.

## PRODUCT DRAWINGS

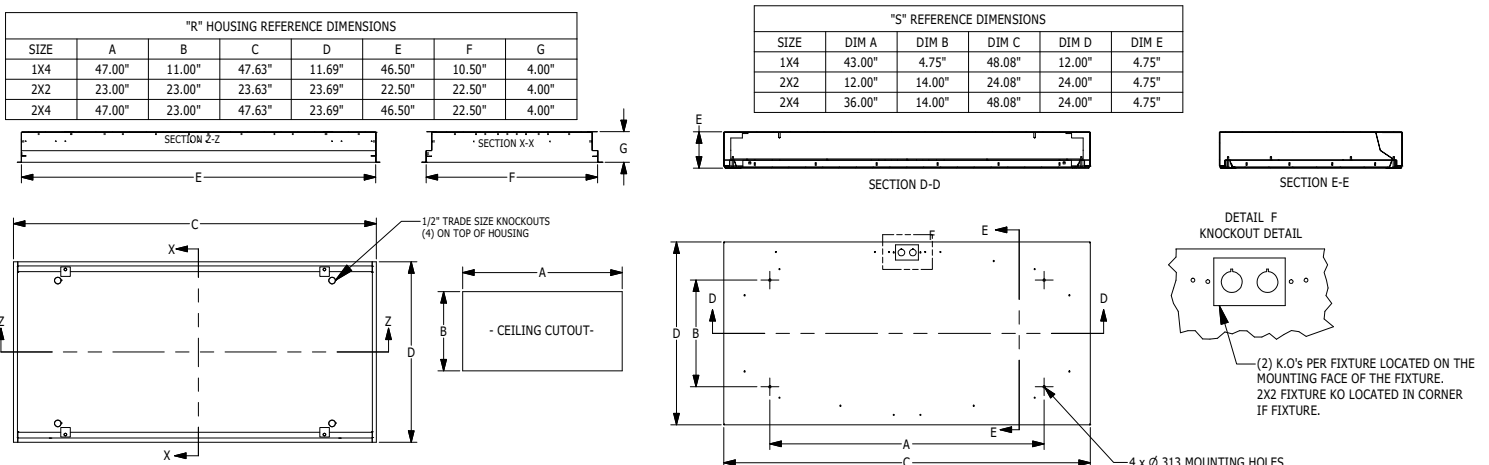

# Hazardous X22 KL Troffers

1x4, 2x2 and 2x4 Fluorescent Luminaires

## ENERGY DATA

| HAZ CLASS 2 DIVISION 2 OVERLAP-FGS-FLUOR TROFFER |           |                       |                                       |               |                               |
|--|-----------|-----------------------|---------------------------------------|---------------|-------------------------------|
| ENCLOSURE SIZE                                   | LAMP TYPE | LAMP QTY <sup>1</sup> | (H1/EM) 1 LAMP EMERGENCY <sup>2</sup> | HAZ TEMP CODE | MAX AMBIENT TEMP <sup>3</sup> |
| 1X4  | F28WT5    | 1 OR 2                | N/A                                   | T3A           | 25°C (77°F)                   |
| 1X4  | F54WT5HO  | 1 OR 2                | N/A                                   | T3A           | 25°C (77°F)                   |
| 2X2  | F14WT5    | 2,3 OR 4              | N/A                                   | T3A           | 25°C (77°F)                   |
| 2X2  | F24WT5HO  | 2,3 OR 4              | N/A                                   | T3A           | 25°C (77°F)                   |
| 2X4  | F28WT5    | 2,3 OR 4              | N/A                                   | T3A           | 25°C (77°F)                   |
| 2X4  | F54WT5HO  | 2,3 OR 4              | N/A                                   | T3A           | 25°C (77°F)                   |

<sup>1</sup> LAMPS SUPPLIED BY OTHERS

<sup>2</sup> TOTAL GENERATED LUMENS (FROM STD EM BALLAST SPECIFICATION SHEET) HIGHER LUMEN OPTIONS MAY BE AVAILABLE

<sup>3</sup> TEMP RATING MAY VARY WITH ALTERNATE SPECIFIED BALLASTS OR ANY NON STANDARD SELECTION