

Medical Exam Room Troffers: ML-ES-LED

1x4, 2x2 and 2x4 High Lumen LED Surface Luminaires with RF Filtering

- **For use in Medical Patient and Exam Rooms**
- **IP55 Rating**
- **RF filtered circuits standard**
- **Symmetric distribution standard**
- **Antimicrobial finish standard**
- **Lutron controls available**
- **B.A.A. & B.A.B.A Compliant & Made in the USA by a Family Owned US Corporation**



DISCLAIMER: Although KURTZON has prepared the information contained in this document with all due care, KURTZON does not warrant or represent that the information is free from errors or omission. While the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and KURTZON is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

ORDERING GUIDE

Series	Material	Size	Row Qty.	LED Type	CCT/CRI	Circuits	Voltage	Mounting	Optics	Options			
ML-ES							UNV	IND					
Series	Material	Size	Light Source			Circuits (white)	Voltage	Mounting	Optics				
			Row Qty.	LED Type	CCT/CRI								
ML-ES	3	White 430 SS Hsg. & White AM 430 SS Door	1	LEDR	83 CRI:	1/CIR	UNV	IND	SYM	P12 Prismatic Lens With Embedded RF Grid			
			2	LEDH	830 3000K	2/CIR			ASY	Diffusing Optics Assembly With Linear Prismatic Asymmetric Distribution			
	4	White Alum Hsg. & White AM 430 SS Door	2x2 2' x 2' Housing	2	LEDHF	835 3500K			Specify Qty of RF Filtered Circuits for White Light			FROST	0.125" Flat Diffusing Frost Acrylic (No RFI Grid)
						840 4000K						LBW	0.125" Flat Diffused Acrylic with Linear Batwing Distribution (No RFI Grid)
	5	White Alum Hsg. & White AM Alum Door	2x4 2' x 4' Housing	3		850 5000K						GH05	0.125" Flat Diffused Acrylic with Glare Suppression Distribution (No RFI Grid)
						4							AB20
	OR					90+ CRI:						Note*: SYM option is standard and will be provided when no other option is selected	
						935 3500K							
						940 4000K							
						950 5000K							
Options													
SW Wet Location Hub Supplied (not installed)													

Ordering Notes, If Applicable

Options	
SW	Wet Location Hub Supplied (not installed)
PxL *	Programmed to User Specified Lumen Value.
PxW *	Programmed to User Specified Wattage Value.
10KV	10KV Parallel Surge Protection (One Supplied Per Circuit)
GTD	Generator Transfer Device
WHIP	Must Specify Length and Wire Qty
OCCMW	Internal Microwave OCC Sensor
FC	Fuse & Holder (One Supplied Per Circuit)
EM10	10W Integral LED EM (Specify Input Voltage)
EM20	20W Remote LED EM (Specify Input Voltage)
LDE1	Lutron Hi-Lume 1% Ecosystem LED Driver SOFTB
SSP	Satin Polished Stainless Steel Doorframe
D20FF	0-10V Dimming to 1% with Dim to Off
Note*: Specify Value in Ordering Notes Below	

Medical Exam Room Troffers: ML-ES-LED

1x4, 2x2 and 2x4 High Lumen LED Surface Luminaires with RF Filtering

SPECIFICATIONS

HOUSING: One piece, hole free, robotically seam welded housing has flattened knockouts for a superior seal. Surface housings are available in .040" 3003 Aluminum or 20Ga 430 Stainless Steel.

DOOR FRAME: Inset door frame made from welded channels regresses into the housing to allow the neoprene gasket to seal to the housing. Door frame is hinged by aircraft cables and secures to housing with captive stainless steel pan head screws. Available in .040" 3003 Aluminum or 20Ga 430 Stainless steel

GASKETS: Closed cell 100% pure neoprene gasket with vulcanized corners making a one-piece oil and solvent resistant gasket system. Four .312" dia. mounting holes and a removable gasketed wiring access plate with Supply entry via 1/2" trade size flattened knockouts..

OPTICS: Standard "SYM" lens provided is a 12 Prismatic Acrylic Lens. ASY Lens option provide a linear prismatic lense with 20 degree beam distribution with frosted overlay. Both SYM & ASY options include a silkscreened RF grid to absorb radiated emissions, (Prisms must face outward). Other optic options are available but do not include the RF grid.

LEDs: Commercially available in a wide variety of Color Temperature (CCT), FLUX, and CRI. Highly efficient and consistent color maintained to 3 SDMC for color critical applications. B50/L70 and compliant with Zhaga recognized hole patterns. Consult factory for LED options or configurations not listed below.

ELECTRICAL: Standard Universal Voltage Class 2 drivers are 0-10v Dimmable to 1% for most LED configurations. They come with at least 2.5Kv surge protection, have less than 10% THD at max load, Ballast Factor Greater than .95 and are programmable to match specific lumen or wattage requirements. Multiple internal circuits are available for scene settings, each specified circuit is provided with an RFI filter that is tested to meet MIL-STD-461. Fixtures available with 10w 90min Emergency battery backup and surge protection. Consult factory for additional options not listed.


REFLECTOR: Die formed metal with high reflectance white polyester powder coat finish. Typical reflectivity 92%.

INSTALLATION: Fixtures are supplied with .875" flattened knockouts for supply entry. Suitable for surface installation onto covered ceilings only.

DOOR FINISH: White Dupont Alesta using Agion silver ion antimicrobial powder coat finish standard. see options for polished stainless steel.

LISTINGS: Military Standard 461G compliant for conducted and radiated emissions. IP55 rated for dust and water ingress. ETL listed per UL_1598 for wet locations. Certified ISO-14644-1 for class 5 through class 9 cleanspaces. Certified Fed Std 209E for Class 100 through Class 100,000 cleanspaces. NSF2 listed for non-food & splash zones. Drivers and LEDs are covered by a 5 year warranty, the remaining fixture is covered by a 10 year warranty. This product Series is both Build America Buy America (B.A.B.A.) & Buy American Act (B.A.A.) compliant.

PRODUCT DRAWINGS

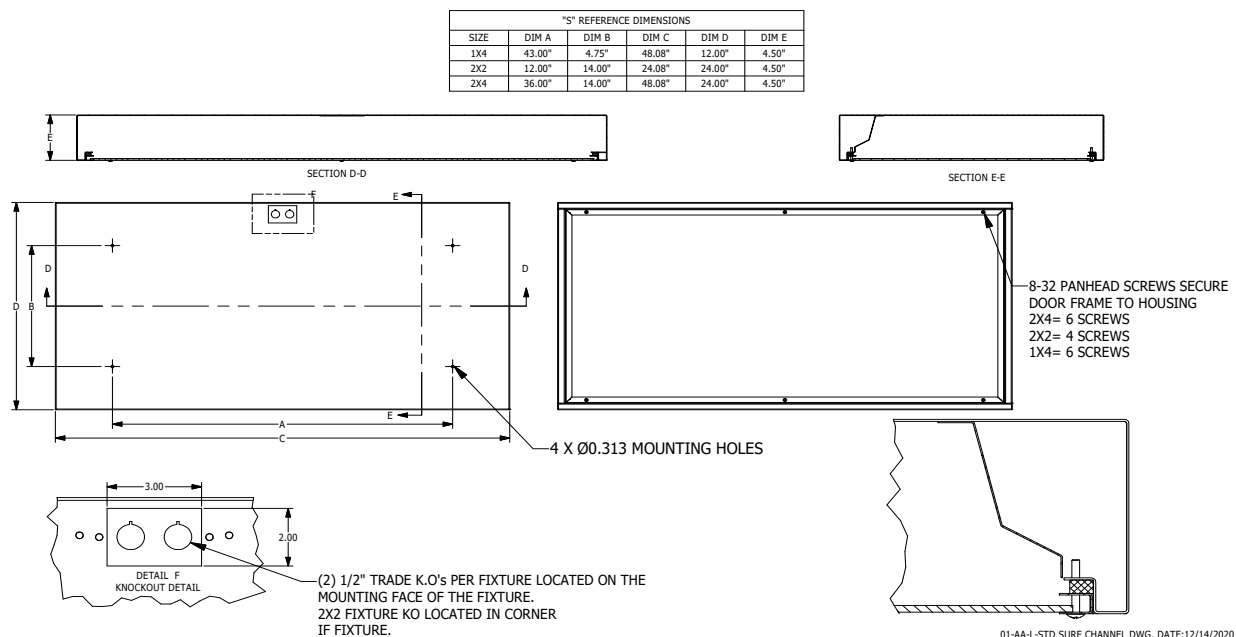

Medical Exam Room Troffers: ML-ES-LED

1x4, 2x2 and 2x4 High Lumen LED Surface Luminaires with RF Filtering

ENERGY DATA

MEDICAL SYMMETRIC CHANNEL-FGRS-LED TROFFER (APPROX ¹ LUMENS DELIVERED)										
ENCLOSURE SIZE	LIGHT PACKAGE	80 CRI (3000K - 5000K)				90 CRI (3500K, 4000K)				STANDARD DIMMING
		LUMENS	WATTS ²	EFFICACY ³	MAX AMB TEMP	LUMENS	WATTS ²	EFFICACY ³	MAX AMB TEMP ⁴	
1X4	1LED	3,215	29	111	45°C (113°F)	3,100	29	107	45°C (113°F)	0-10V 1%
1X4	2LED	6,430	55	117	45°C (113°F)	6,199	56	111	45°C (113°F)	0-10V 1%
1X4	2LEDH	12,446	109	114	35°C (95°F)	11,915	109	109	35°C (95°F)	0-10V 1%
1X4	2LEDHF	18,763	153	123	35°C (95°F)	16,060	182	88	35°C (95°F)	0-10V 1%
1X4	EM10	1110-1230	4	NA	40°C (104°F)	880-1110	4	NA	40°C (104°F)	NA
2X2	2LED	3,260	29	112	45°C (113°F)	3,270	29	113	45°C (113°F)	0-10V 1%
2X2	3LED	4,887	42	116	45°C (113°F)	4,902	42	117	45°C (113°F)	0-10V 1%
2X2	2LEDH	6,410	55	117	40°C (104°F)	6,130	55	111	40°C (104°F)	0-10V 1%
2X2	4LED	6,510	55	118	45°C (113°F)	6,530	55	119	45°C (113°F)	0-10V 1%
2X2	3LEDH	9,608	80	120	40°C (104°F)	9,186	81	113	35°C (95°F)	0-10V 1%
2X2	4LEDH	12,800	109	117	40°C (104°F)	12,240	109	112	35°C (95°F)	0-10V 1%
2X2	4LEDHF	18,782	153	123	35°C (95°F)	16,760	184	91	35°C (95°F)	0-10V 1%
2X2	EM10	1120-1230	4	NA	40°C (104°F)	910-1190	4	NA	40°C (104°F)	NA
2X4	2LED	6,942	55	126	45°C (113°F)	6,640	56	119	45°C (113°F)	0-10V 1%
2X4	3LED	10,412	83	125	45°C (113°F)	9,954	83	120	45°C (113°F)	0-10V 1%
2X4	2LEDH	13,650	109	125	40°C (104°F)	12,990	109	119	40°C (104°F)	0-10V 1%
2X4	4LED	13,880	111	125	45°C (113°F)	13,270	113	117	45°C (113°F)	0-10V 1%
2X4	3LEDH	20,464	164	125	40°C (104°F)	19,482	164	119	40°C (104°F)	0-10V 1%
2X4	4LEDH	27,280	220	124	40°C (104°F)	25,970	220	118	40°C (104°F)	0-10V 1%
2X4	4LEDHF	40,613	305	133	35°C (95°F)	35,810	373.3	96	35°C (95°F)	0-10V 1%
2X4	EM10	1240-1330	4	NA	40°C (104°F)	960-1200	4	NA	40°C (104°F)	NA

¹ DELIVERED LUMEN DATA IS EXTRAPOLATED FROM MEASURED DATA @ 25°C WITH NO EXTRA OPTIONS. VARIANCES WILL OCCUR WHEN OPTIONS ARE CHOSEN

² WATTAGE IS MEASURED WITH 4000K SELECTION @ 120VAC AND Tambient = 25°C. WATTAGES MAY VARY WITH ALTERNATE CONFIGURATIONS


³ EFFICACY CALCULATED USING 4000K CCT DATA.

⁴ MAX AMBIENT TEMP RATING, NON-IC INSTALLATION. TEMP RATING MAY VARY WITH SPECIFIED DRIVERS OR ANY NON STANDARD SELECTION

⁵ 90 MINUTE 10W EMERGENCY DRIVER; LUMENS CALCULATED BASED ON FIXTURE EFFICACY.

PHOTOMETRICS

SYMMETRIC DISTRIBUTION

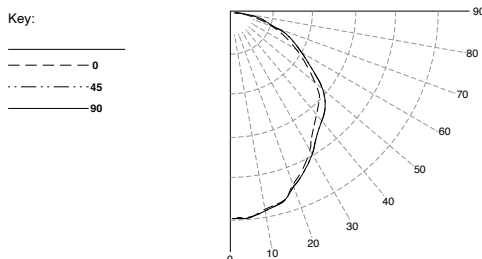

ASYMMETRIC DISTRIBUTION

