

Vandal B Profile Wrap

Vandal Resistant Sealed Surface High Efficiency LED Wrap Luminaire

- **ETL Listed for Wet Locations**
- **IP65 Rating**
- **Polycarbonate lensing standard**
- **Several Mounting options**
- **Tamperproof fasteners standard.**
- **DLC Listed**



To See All DLC Listings,
Visit www.Kurtzon.com/DLC

DISCLAIMER: Although KURTZON has prepared the information contained in this document with all due care, KURTZON does not warrant or represent that the information is free from errors or omission. While the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and KURTZON is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

ORDERING GUIDE

Series	Lens Type	Material	Size	Source	CCT	Voltage	Options
VL							
VL	B: Frosted Acrylic LPB: Clear Linear Prismatic Poly FPB: Frosted Linear Prismatic Poly	1: White CRS Ext. & White CRS Int. 3: Polished 304 SS Ext. & 304 SS Int. 4: White Alum Ext. & White CRS Int.	20: 2' Housing 40: 4' Housing	2/LEDR 3/LEDR	83 CRI: 830 = 3000K CCT 835 = 3500K CCT 840 = 4000K CCT 850 = 5000K CCT 90+ CRI: 935 = 3500K CCT 940 = 4000K CCT	120V 277V UNV 347V*	FC: Fuse & Holder (One Supplied Per Circuit) EDL: -40F Electronic Driver EM10: 10W Integral LED Battery Pack (Specify Input Voltage) CRM: Continuous Row Mounting AH: Stainless Steel Allen Head Tamperproof Fasteners SW: Conduit Hub, Ring & Plug (installed on endcaps) WHT: White Finished Stainless Steel PMB: (2) Pendant Mount Brackets (Pendants or Chains by Others) CMB: (2) Corner Mount Brackets AMB: (2) Adjustable Mount Brackets PxL: Programmed to User Specified Lumen Value PxW: Programmed to User Specified Wattage Value 10KV: 10KV Parallel Surge Protection (One Supplied Per Circuit) GTD: Generator Transfer Device (Specify Input Voltage) WHIP: Must Specify Length and Wire Qty OCCMW: Microwave Occ Sensor (inside fixture)

Vandal B Profile Wrap

Vandal Resistant Sealed Surface High Efficiency LED Wrap Luminaire

SPECIFICATIONS

HOUSING: Double channel housing of 20Ga 1008 Cold Rolled Steel, 20Ga 304 Stainless Steel, or .040" 3003 Aluminum construction.

END CAPS: Precision stamped 20Ga 304 Stainless Steel end caps secured to housing with captive stainless steel Torx head screws. SW Option provides a sealed conduit hub installed on endcap.

GASKETS: Closed cell 100% pure neoprene gasketing. Resists aging, grease and solvents.

LENS: Extruded .125" thick linear prismatic polycarbonate available in clear or with frost inlay for obscuring LED image.

LEDS: Commercially available in a wide variety of Color Temperature (CCT), FLUX, and CRI. Highly efficient and consistent color maintained to 3 SDMC for color critical applications. B50/L70 and compliant with Zhaga recognized hole patterns. Consult factory for LED options or configurations not listed below.

DRIVERS: Standard Universal Voltage Class 2 drivers are 0-10v Dimmable to 1% for most LED configurations. They come with at least 2.5Kv surge protection, have less than 10% THD at max load, Ballast Factor Greater than .95 and are programmable to match specific lumen or wattage requirements. Drivers with higher input voltage ratings are available, consult factory for driver specifications.

REFLECTOR: Die formed metal with high reflectance white polyester powder coat finish. Typical reflectivity 92%.

INSTALL SURFACE: Suitable for wet locations under covered ceilings only. Four .312" debossed holes for surface mounting. One .875" (1/2" trade-size) flattened and knockout located on back of housing for wiring. See below for other mounting and supply entry options.

ROWS: Joiner bands provided for continuous row mounting (See Option: CRM). Please specify number of fixtures in each run.



FINISH: Stainless Steel Housings are Satin Polished unless option "WHT" is selected. All other housings are finished with gloss white high reflectance 1000hr saltspray polyester powdercoating.

LISTINGS: IP65 rated for dust and water ingress. ETL listed per UL_1598 for wet locations. Drivers and LEDs are covered by a 5 year warranty, the remaining fixture is covered by a 10 year warranty.

PRODUCT DRAWINGS

CRM INSTALLATION

B PROFILE REFERENCE DIMENSIONS						
SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	DIM G
20	5.9"	6.2	3.0"	25.07"	13.0"	50.07"
40	5.9"	6.2"	3.0"	49.2"	37.0"	89.2"




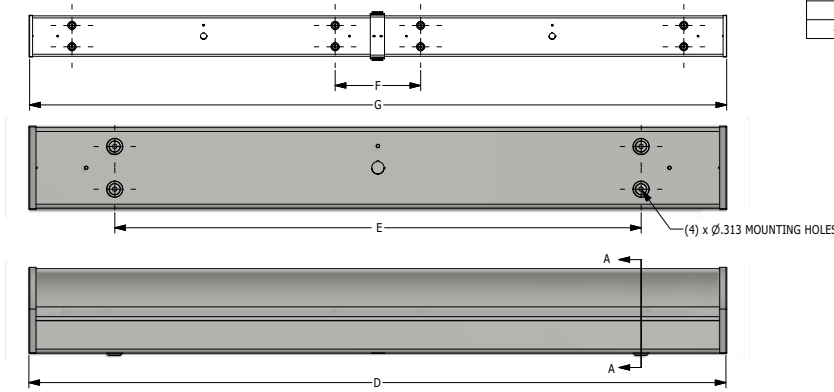


AMB OPTION

CMB OPTION

PMB OPTION

CRM JOINER BAND



05-BA-L-B PROFILE WRAP DWG DATE: 6/04/18

Vandal B Profile Wrap

Vandal Resistant Sealed Surface High Efficiency LED Wrap Luminaire

ENERGY DATA


"B" PROFILE LED WRAP (APPROX ¹ LUMENS DELIVERED)											
LENS TYPE	ENCLOSURE SIZE	LED SELECTION	STANDARD DIMMING	83 CRI (3000K - 5000K)				90 CRI (3500K - 4000K)			
				LUMENS	WATTS ²	EFFICACY ³	MAX AMB TEMP ⁴	LUMENS	WATTS ²	EFFICACY ³	MAX AMB TEMP ⁴
B	20	2LEDR	0-10V 1%	3,539	29	122	40°C (104°F)	2,930	29	101	40°C (104°F)
FPB	20	2LEDR	0-10V 1%	2,960	29	102	40°C (104°F)	2,450	29	84	40°C (104°F)
LPB	20	2LEDR	0-10V 1%	3,578	29	123	40°C (104°F)	3,080	29	106	40°C (104°F)
B	20	3LEDR	0-10V 1%	5,300	44	120	40°C (104°F)	4,390	44	100	40°C (104°F)
FPB	20	3LEDR	0-10V 1%	4,400	44	100	40°C (104°F)	3,650	44	83	40°C (104°F)
LPB	20	3LEDR	0-10V 1%	5,400	44	123	40°C (104°F)	4,560	44	104	40°C (104°F)
B	40	2LEDR	0-10V 1%	7282	56	130	40°C (104°F)	6,040	56	108	40°C (104°F)
FPB	40	2LEDR	0-10V 1%	6,060	56	108	40°C (104°F)	5,030	56	90	40°C (104°F)
LPB	40	2LEDR	0-10V 1%	7,400	56	132	40°C (104°F)	6,200	56	111	40°C (104°F)
B	40	3LEDR	0-10V 1%	10,900	85	128	40°C (104°F)	9,040	85	106	40°C (104°F)
FPB	40	3LEDR	0-10V 1%	9,090	85	107	40°C (104°F)	7,540	85	89	40°C (104°F)
LPB	40	3LEDR	0-10V 1%	11100	85	131	40°C (104°F)	9,260	85	109	40°C (104°F)

- 1 DELIVERED LUMEN DATA IS EXTRAPOLATED FROM MEASURED DATA @25C WITH NO EXTRA OPTIONS. VARIANCES WILL OCCUR WHEN OTHER SELECTIONS ARE MADE
- 2 WATTAGE IS MEASURED WITH 4000K SELECTION @ 120vAC AND Tambient = 25C. WATTAGES MAY VARY WITH ALTERNATE CONFIGURATIONS
- 3 EFFICACY CALCULATED USING 4000K CCT DATA.
- 4 MAX AMBIENT TEMP RATING. TEMP RATING MAY VARY WITH ALTERNATE SPECIFIED DRIVERS OR ANY NON STANDARD SELECTION
- 5 DELIVERED LUMENS FOR EM10 = (10W)*(EFFICACY) = DELIVERED LUMENS. EM10 ADDS 4W TO TOTAL LUMINAIRE

PHOTOMETRICS

VL-LPB-1-20-2/LEDR835-UNV

Report No: 103047098CRT-001
 Total Lumens: 3,578
 Wattage: 29.02
 Efficacy: 123.3 (Lumens Per Watt)
 Fixture Size: 2'
 Key:
 - - - - - 0
 ······ 45
 ———— 90

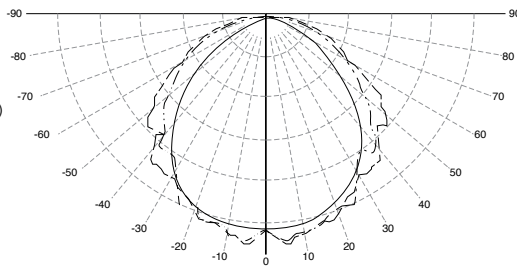

VL-B-1-20-2/LEDR835-UNV

Report No: 103047098CRT-002
 Total Lumens: 3,539.7
 Wattage: 29.00
 Efficacy: 122.1 (Lumens Per Watt)
 Fixture Size: 2'
 Key:
 - - - - - 0
 ······ 45
 ———— 90

