

# Vandal Troffers

Vandal Resistant High Abuse 1x4, 2x2 and 2x4 Fluorescent Luminaires

- **For Public Spaces**
- **IP65 Rated**
- **Rigid One Piece Inset Door sits flush with housing for tamper resistance**
- **Provided with SS Tamper resistant fasteners standard.**
- **Combined lensing thickness up to 3/8" thick.**
- **Robotically seam welded enclosure**



DISCLAIMER: Although KURTZON has prepared the information contained in this document with all due care, KURTZON does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and KURTZON is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

## ORDERING GUIDE

Series	Installation	Material	Size	Lamps	Voltage	Lens: LED Side / Room Side	Options
<b>VL</b>							

Series	Installation Type	Material	Size	Lamps	Voltage	Lens: LED Side / Room Side	Options		
VL	R: Recessed <small>(suitable for flange and grid)</small>	3: White 430 SS Hsg. & Polished 304 SS Door	1x4: 1' x 4' Housing  2x2: 2' x 2' Housing OR 2x4: 2' x 4' Housing	2/T5: F28T5	120V  277V  UNV  347V*	<b>Choose One Layer of Prismatic Lensing</b> 1: .125" P12 Polycarbonate 2: .140" P12 High Impact Acrylic 3: .156" P12 Polycarbonate 4: .156" P73 Tempered Glass	FC: Fuse & Holder (One Supplied Per Circuit) 2/EB: Two Ballasts (Two Circuits) EBL: -20F Electronic Ballast WH: White Finished Door & HSG SW: Wet Location Hub Supplied (not installed) 1/EM: 1 Lamp EM (See Chart For Lamp Compatibility) 10KV: 10KV Parallel Surge Protection (1 Per Circuit)		
		4: White AL Hsg. & Polished 304 SS Door		2/T5HO: F54FTHO					
		5: White AL Hsg. & White AL Door		2,3,4 or 6/T5: F14T5					
	7: White AL Hsg. & White CRS Door	2,3,4 or 6/T5HO: F24T5HO							
	S: Surface	1: White CRS Hsg. & White CRS Door	1x4: 1' x 4' Housing  2x2: 2' x 2' Housing OR 2x4: 2' x 4' Housing	1,2, or 3/T5: F28T5				<b>Choose One Layer of Non-Prismatic Lensing</b> 5: .125" Clear Flat Polycarbonate 6: .187" Clear Flat Polycarbonate 7: .250" Clear Flat Polycarbonate	GTD: Generator Transfer Device WHIP: Must Specify Length and Wire Qty AH: Allen Head SS tamperproof Fasteners OCCMW: Microwave Occupancy Sensor (Inside Fixture) PMB: Pendant Mounting Bracket (Surface Housings Only)
		2: White CRS Hsg. & Polished 304 SS Door		1,2, or 3/T5HO: F54FTHO					
3: Polished 304 SS Hsg. & Polished 304 SS Door		2,3,4 or 6/T5: F14T5							
	4: White AL Hsg. & Polished 304 SS Door		2,3,4 or 6/T5HO: F24T5HO						
	5: White AL Hsg. & White AL Door								
	6: White CRS Hsg. & White AL Door								
	7: White AL Hsg. & White CRS Door								

# Vandal Troffers

Vandal Resistant High Abuse 1x4, 2x2 and 2x4 Fluorescent Luminaires

## SPECIFICATIONS

**HOUSING:** One piece, hole free, robotically seam welded housing has flattened knockouts for a superior seal. Recessed housings are available in .040" 3003 Aluminum or 20Ga 430 Stainless Steel. Surface housings are available in .050" 3003 Aluminum, 20Ga 430 Stainless Steel, or 20Ga Cold Rolled Steel.

**DOOR FRAME:** One piece seam welded inset door frame regresses flush into the housing. Door frame is hinged by aircraft cables and secures to housing with captive stainless steel torx pan head screws. Available in .040" 3003 Powder coated Alum. , 20Ga 304 Polished SS, or 18Ga Powder coated Cold Rolled Steel.

**GASKETS:** Closed cell microcellular extruded KleanLock SealPro gasket with vulcanized corners making a one-piece oil and solvent resistant gasket system.

**LENS:** High durability minimum .125" thick polycarbonate with P12 prismatic pattern inverted. Factory sealed to door with silicone. Select up to (2) lenses, only (1) prismatic.

**LAMPS:** Suitable for most T5 and T5HO lamps. (By others)

**ELECTRICAL:** Standard Class P Ballast - Electronic < 10% THD, high performance rapid start universal voltage (120-277). See options for Dimming or Cold Temp Ballasts, Others available (must specify). Dual level switching available with 2/EB option

**REFLECTOR:** Die formed metal with high reflectance white polyester powder coat finish. Typical reflectivity 92%.


**INSTALL RECESSED:** One fixture suitable for Grid and Flanged installation. Accommodates 1" and 1.5" T-Bar Grid (Consult factory for 2" T-Bar Grid compatibility). Four adjustable toggle arms with holes for seismic support wire attachment. Supply entry via 1/2" trade size flattened knockouts.

**INSTALL SURFACE:** Four .312" dia. mounting holes and a removable gasketed wiring access plate with Supply entry via 1/2" trade size flattened knockouts.

**FINISH:** Gloss white high reflectance 1000 hr. salt spray polyester powder coat finish standard for all recessed housings. Stainless steel doorframes and stainless steel surface housings are satin polished unless option WHT is chosen.

**LISTINGS:** IP65 rated for dust and water ingress. Suitable for 1700 PSI high pressure hosedowns. UL listed per UL\_1598 for wet locations. Chicago Plenum Rated. Electrical components covered under manufacturers warranty, the remaining fixture is covered by a 10 year warranty.

## PRODUCT DRAWINGS

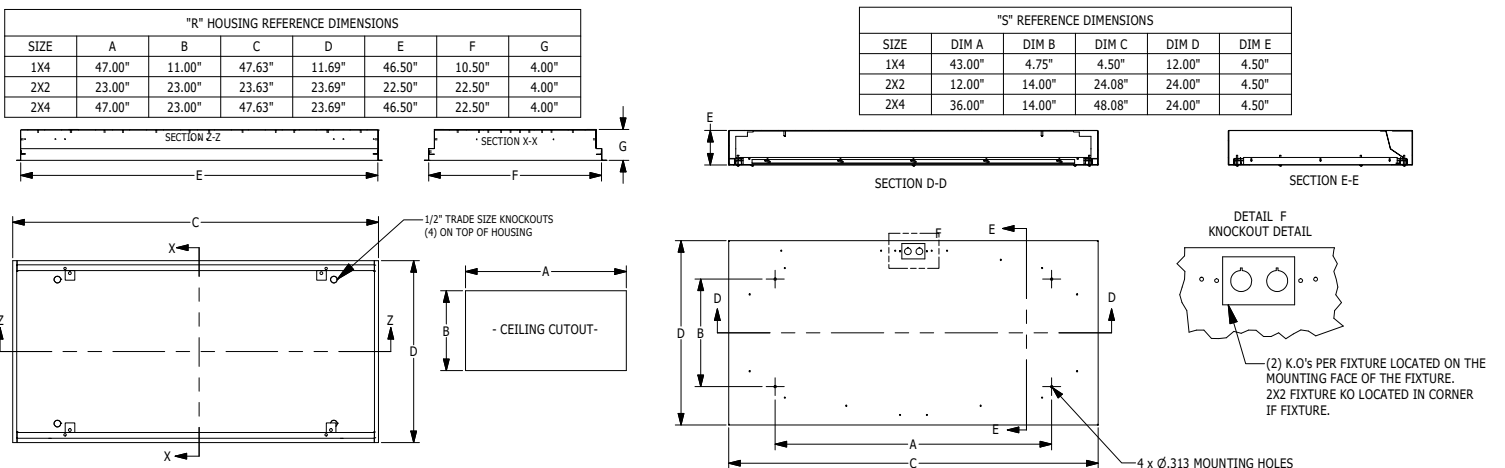

## Vandal Troffers

Vandal Resistant High Abuse 1x4, 2x2 and 2x4 Fluorescent Luminaires

### ENERGY DATA

ONE PIECE POLY INSET-FGS-FLUOR TROFFER				
ENCLOSURE SIZE	LAMP TYPE	LAMP QTY <sup>1</sup>	(1/EM) 1 LAMP EMERGENCY <sup>2</sup>	MAX AMBIENT TEMP <sup>3</sup>
1X4	F28WT5	1,2, OR 3	1050 Lm	40°C (104°F)
1X4	F54WT5HO	1,2, OR 3	1150 Lm	40°C (104°F)
2X2	F14WT5	2,3,4, OR 6	850 Lm	40°C (104°F)
2X2	F24WT5HO	2,3,4, OR 6	925 Lm	40°C (104°F)
2X4	F28WT5	2,3,4, OR 6	1050 Lm	40°C (104°F)
2X4	F54WT5HO	2,3,4, OR 6	1150 Lm	40°C (104°F)

<sup>1</sup> LAMPS SUPPLIED BY OTHERS

<sup>2</sup> TOTAL GENERATED LUMENS (FROM STD EM BALLAST SPECIFICATION SHEET) HIGHER LUMEN OPTIONS MAY BE AVAILABLE

<sup>3</sup> TEMP RATING MAY VARY WITH ALTERNATE SPECIFIED BALLASTS OR ANY NON STANDARD SELECTION